

EXAMPLE OF PRODUCTION LINE



| | |
|---------------------------|---|
| PRODUCT | Pork Shoulder |
| MACHINE AND SPECIFICATION | Planet Neo 3m 2 stages outlet conveyor |
| MACHINE SETTING | Slice Thickness:2.2mm Slice Speed:220slices/min. |

■ SPECIFICATIONS

| | |
|--|-----------------------------------|
| DIMENTIONS | W3,670*L970*H1,790mm |
| WEIGHT | 370kg(Main body only) |
| PROCESSABLE DIMENTIONS | W300*H150*L900mm |
| SLICE THICKNESS | 0.5~20mm(Depends on product) |
| CAPACITY | 50~240slices/min |
| SLICE TEMPRATURE | -2~+4°C(Depends on product) |
| RATED ELECTRIC CAPACITY | OUTPUT2.08kW CURRENT11.1A |
| POWER CONSUMPTION | 0.62kW(50/60Hz w/o load) |
| POWER SUPPLY | 3Phase 200V 50/60Hz More than 20A |
| OPERATING AIR PRESSURE/AIR CONSUMPTION | 0.5MPa 3ℓ/min |
| COMPRESSED AIR CONNECTION PORT | JS-02 (JoplaX) |

WATANABE
WATANABE FOODMACH CO.,LTD.

2-12-26 TSUYUHASHI NAKAGAWA-KU NAGOYA JAPAN
TEL 052-361-8511 FAX 052-361-8490
U R L: <https://www.foodmach.co.jp/>

SALES AGENT

WATANABE

PLANET NEO

WPN-N282



Minimize machine body and your cost.
Maximize your profit and space. Wide rang of slices.



※ OPERATION TABLES FOR BOTH SIDES OF AN OUTLET CONVEYOR ARE THE OPTION.


THE FULL VALUE OF HIGH PRODUCTION EFFECIENCY

Large sized inlet meat tank is newly designed (W300mm x H150mm). Flexible upper feeding conveyors grip the product tightly for the stable slicing.



GREAT BLADE SHARPNESS, BETTER PRODUCT YIELD

Feeding system and functions around blades are redesigned. Holding power for products is increased, resulting in more accurate feeding system.

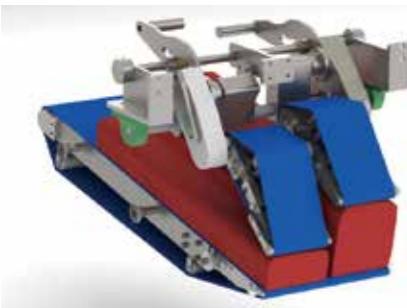

HYGIENE

Machine, especially around the slicing position, can be washed down, leading to the shortening of the cleaning time.



“NEO” STANDARD OF SLICING MEAT !!




※ OPERATION TABLES FOR BOTH SIDES OF AN OUTLET CONVEYOR ARE THE OPTION.

VARIETY OF PRODUCTS BY WPN-N282

HASHED PORK



THIN SLICED PORK BELLY



PORK LOIN TRIMMINGS



PORK THIGH TRIMMINGS



THIN SLICED PORK LOIN



PORK STEAK



THIN SLICED BACON



WHALE BACON



EASY-TO-USE & SIMPLE TOUCH PANNEL

Recommended values for popular items have been already set in the program. Easy to get best settings even for beginners. Different conditions for each product can be surely registered.



SAFETY

Interlock systems are used for all covers. Reminders from the interlock system can be checked by a touch panel for your safety.



OTHER FEATURES

● **Semi Automatic Grinder System**
Keep the best condition of blades.
(Air compressor needed.)

● **Meat Detection Sensor**
Sensors tell you the timing to feed new materials on the inlet conveyor.

OPTIONS

WE ARE HAPPY TO CUSTOMIZE THE MACHINE DEPENDENT ON CUSTOMER'S REQUESTS.

● **Increase Max. Slice Speed**
Max. slice speed can be changed to 300 slices/min. by customer's request.

● **Outlet Conveyor**
Outlet conveyor can be modified. length of c/v, double-layered c/v