

STEALTH

WPS-140R



Weight Management Slicing:
Capable of producing fixed weight tonkatsu slices.



Easy operation for anyone

Operation is performed via a touch panel. Only the weight needs to be set, and the target weight can be freely adjusted without changing molds.

(Examples: 80g, 95g, 103g, 122g, etc.)




Improved productivity

Simply press the start button to load raw meat onto the conveyor. Continuous slicing without stopping boosts productivity.

In addition, raw materials can be stocked in advance, allowing operators to perform other tasks while slicing.

Overall production efficiency is greatly improved!

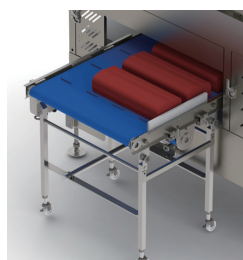


Safety

All openings are equipped with interlock mechanisms.

Status is clearly displayed on the touch panel for improved visibility.

In addition, the loading section features a world-standard interlock system to ensure safe operation.

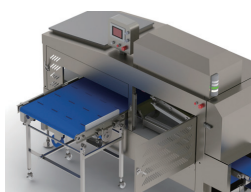

Minimum weight variation between products

The newly developed Weight Management System, featuring our patented pressing mechanism, firmly holds the raw material to minimize variation and ensure that all sliced products have consistent weight.

High-quality product creation

Watanabe's proprietary cutting system (patented) contributes to producing visually appealing, high-quality products.



Sanitation

Can be washed with water and disassembled without tools.

The mold can be easily attached/detached using a dedicated lift or rack for hygienic management and storage.

The touch panel will show the cleaning procedure, so anyone can clean with ease. The cleaning procedure will take about 30 minutes with 2 workers.




Lift Rack

SPECIFICATIONS

DIMENSIONS	W3,150*D1,550*H1,670mm
WEIGHT	900kg
PROCESSABLE DIMENSIONS	W140*H60*L750mm
PRODUCT OUTPUT WEIGHT	Between 20g~450g
CAPACITY (Reference) During chilled mode operation	Pork slices: 3,000 slices/hr (Varies depending on the size and set weight of the raw material)
SLICE TEMPERATURE	-2~+4°C (Depends on product)
SLICE ANGLE	FIXED 0°
RATED ELECTRIC CAPACITY	OUTPUT 2.29kW CURRENT 17A
POWER CONSUMPTION	0.29kW (50/60Hz w/o load)
POWER SUPPLY	3Phase 200V 50/60Hz More than 20A
OPERATING AIR PRESSURE/AIR CONSUMPTION	0.5MPa 120ℓ/min
COMPRESSED AIR CONNECTION PORT	JSL-02 (JoplaX)

DIMENSIONS

PLEASE CHECK APPROVED DRAWING FOR FURTHER DETAILS.

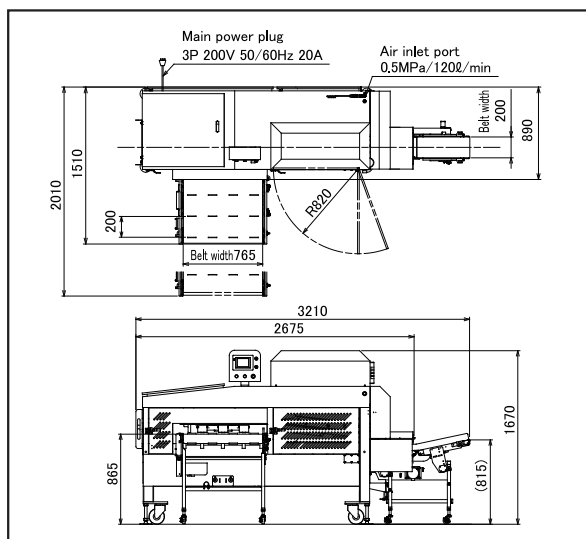

WATANABE
WATANABE FOODMACH CO.,LTD.

2-12-26 TSUYUHASHI NAKAGAWA-KU NAGOYA JAPAN
TEL052-361-8511 FAX052-361-8490
URL : <https://www.foodmach.co.jp/>

SALES AGENT